

CE EMC Test Report

(Declaration of Conformity)
For
Electromagnetic compatibility
Of

Product Name : Massage Comb

Trade Mark : N/A

Model Number(s) : SYM-028

Additional Model Number(s) : N/A

Prepared for

Shenzhen Pihai Technology Co., Ltd.
Room 301, Factory No. 1, Nianshan Industrial Zone, Qiaotou Community, Fuhai Street, Bao'an
District, Shenzhen

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
Building 1/2/11/12, No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Bao'an
District, Shenzhen, Guangdong, China
Tel.: 0755-2320 0050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's Name : Shenzhen Pihai Technology Co., Ltd.
Address : Room 301, Factory No. 1, Nianshan Industrial Zone, Qiaotou
Community, Fuhai Street, Bao'an District, Shenzhen
Manufacturer's Name : Shenzhen Pihai Technology Co., Ltd.
Address : Room 301, Factory No. 1, Nianshan Industrial Zone, Qiaotou
Community, Fuhai Street, Bao'an District, Shenzhen
Factory's Name : Shenzhen Pihai Technology Co., Ltd.
Address : Room 301, Factory No. 1, Nianshan Industrial Zone, Qiaotou
Community, Fuhai Street, Bao'an District, Shenzhen

Product description

Product Name : Massage Comb
Model Number(s) : SYM-028
Additional Model
Number(s) : N/A
Standards : EN IEC 55014-1:2021
EN IEC 55014-2:2021

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number : S2604290028-1#
Date of Test :
Date (s) of performance of tests : 29 Apr. 2026 ~ 09 May. 2026
Date of Issue : 09 May. 2026
Test Result : **Pass**

Testing Engineer

:

Rarga Wan

(Rarga Wan)

Technical Manager

:

Sky Zhang

(Sky Zhang)

Authorized Signatory

:

Alex

(Alex)

Table of Contents

Page

1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 ENVIRONMENTAL CONDITIONS	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 DESCRIPTION OF TEST SETUP	9
2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.6 MEASUREMENT INSTRUMENTS LIST	10
2.7 MEASUREMENT SOFTWARE	11
3 . EMC EMISSION TEST	12
3.1 RADIATED EMISSION MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)	12
3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT (Below 1000MHz)	12
3.1.3 TEST PROCEDURE	13
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS (30-1000MHz)	15
4 . EMC IMMUNITY TEST	17
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	17
4.2 GENERAL PERFORMANCE CRITERIA	17
4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP	17
4.4 ESD TESTING	18
4.4.1 TEST SPECIFICATION	18
4.4.2 TEST PROCEDURE	18
4.4.3 TEST SETUP	19
4.4.4 TEST RESULTS	20
4.5 RS TESTING	21
4.5.1 TEST SPECIFICATION	21
4.5.2 TEST PROCEDURE	21
4.5.3 TEST SETUP	22
4.5.4 TEST RESULTS	23
5 . EUT TEST PHOTO	24
ATTACHMENT PHOTOGRAPHS OF EUT	25

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN IEC 55014-1:2021	Conducted Emission	-----	N/A	
	Radiated Emission	-----	PASS	
EMC Immunity				
Section EN IEC 55014-2:2021	Test Item	Performance Criteria	Judgment	Remark
EN IEC 61000-4-2	Electrostatic discharge	B	PASS	
EN IEC 61000-4-3	Radiated, radio-frequency, electromagnetic field	A	PASS	
EN 61000-4-4	Electrical fast transient/burst	-----	N/A	
EN 61000-4-5	Surge	-----	N/A	
EN IEC 61000-4-6	Conducted disturbances, induced by radio-frequency fields	-----	N/A	
EN IEC 61000-4-11	Voltage dips, short interruptions and voltage variations	-----	N/A	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : Building 1/2/11/12, No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L5516

ISED-Registration : The Company Number: 9270A.
CAB identifier: CN0074.

FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Measurement Frequency Range	K	U(dB)
Conducted Emission	0.15MHz ~ 30MHz	2	3.3
Radiated Emission(#1)	30MHz ~ 1000MHz	2	4.9
Radiated Emission(#2)	30MHz ~ 1000MHz	2	5.0
Power Clamp	30MHz ~ 300MHz	2	2.2

[illegible]

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Massage Comb	
Model Number(s)	SYM-028	
Additional Model Number(s)	N/A	
Model Difference	All models are identical except color. Full tests performed on model SYM-028.	
Product Description	The EUT is a Massage Comb.	
	Operating frequency:	Below 108 MHz (Declaration by Manufacturer)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as a Household Device, judged to be category III according to EN IEC 55014-2:2021. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage	
Power Rating	DC 5V, 1A powered by Type-C Port or DC 3.7V, 400mAh powered by Battery	

2.2 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature(°C):	25.3 ~ 25.5
Humidity(%RH):	52.0 ~ 53.5
Atmospheric pressure(kPa):	101

2.3 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively. All test modes in the table below are tested, the worst case is listed on this report.

Pretest Mode	Description
Mode 1	Charging + Working(Red + Vibration)

For Radiated Test	
Final Test Mode	Description
Mode 1	Charging + Working(Red + Vibration)

For EMS Test	
Final Test Mode	Description
Mode 1	Charging + Working(Red + Vibration)

2.4 DESCRIPTION OF TEST SETUP



2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Series No.	Note
E-1	Massage Comb	N/A	SYM-028	N/A	EUT
E-2	Adapter	N/A	KSA29B0500200D5	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	75cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.6 MEASUREMENT INSTRUMENTS LIST

2.6.1 RADIATED TEST

Item	Name of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	3M Semi Anechoic Chamber	/	9*6*6	LES-318-C	2027/6/6
2	3M Semi Anechoic Chamber	N/A	9*6*6	LES-411-C	2027/6/17
3	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2027/4/25
4	EMI Test Receiver	R&S	ESCI	101160	2027/4/7
5	EMI Test Receiver	R&S	ESR7	102679	2027/4/7
6	EMI Test Receiver	R&S	ESPI3	100145	2027/4/7
7	EMI Test Receiver	R&S	ESPI3	101417	2026/7/22
8	Attenuator	Eastsheep	5W-N-JK-6G-6DB	/	2027/4/7
9	Attenuator	Eastsheep	5W-N-JK-6G-6DB	1#	2026/7/10
10	Attenuator	Eastsheep	5W-N-JK-6G-6DB	2#	2026/7/10
11	Attenuator	Eastsheep	5W-N-JK-6G-6DB	3#	2026/7/10
12	Cable	Talent Microwave	A81-NWMSMAM-1 2M	21120897	2027/4/25
13	Cable	Talent Microwave	A81-NMNM-10M	22084896	2027/4/25
14	Cable	Talent Microwave	A81-NMNM-2M	22084895	2027/4/25
15	Cable	Talent Microwave	A50-NMNM-2M	22084884	2027/4/25
16	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	584	2027/4/10
17	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	586	2027/4/17
18	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	675	2027/4/24
19	Log-Periodic Antenna	SCHWARZBECK	VULB 9168	1742	2026/10/31
20	50Ω Coaxial Switch	Anritsu	MP59B	6200983704	2027/4/25
21	Absorbing Clamp	R&S	MDS-21	100423	2027/4/28
22	Low Frequency Cable	/	P-01	/	2027/4/24

2.6.2 ESD

Item	Name of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Electrostatic Discharge Generator	Lioncel	ESD-203B	ESD203B0150 402	2026/6/2
2	ESD Generator	EVERFINE	EMS61000-2A	P615727TA142 1113	2027/4/29

2.6.3 RS

Item	Name of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Semi Anechoic Chamber	/	7*5*4	/	2027/7/2
2	RF Test System Controller	AR	SC1000	350156	2027/4/25
3	Power amplifier	/	MPA-1000-6000-10 0	MPA2502035	2026/5/11
4	Power Amplifier	rflight	NTWPA-00810200	17063153	2027/4/7
5	Bilog Antenna	ETS	3142E	00214344	2027/5/30
6	ESG Vetctor Signal Generator	Agilent	E4438C	MY45093347	2027/4/7
7	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2027/4/26

2.7 MEASUREMENT SOFTWARE

RADIATED TEST		
Software name	Manufacturer	Version number
EZ-EMC_RE	Farad	EMEC-3A1+
RS TEST		
Software name	Manufacturer	Version number
RadiMation Pro	Raditeq	2024.1.6

3. EMC EMISSION TEST

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	☐ At 10m (dB μ V/m)	☒ At 3m (dB μ V/m)
30 - 230	30	40
230 - 1000	37	47

3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT (Below 1000MHz)

Frequency Range	General		Tools					
			P $\leq$ 700W		700W<P $\leq$ 1000W		P>1000W	
1	2	3	4	5	6	7	8	9
(MHz)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)
30-300	Increasing linearly with the frequency from:							
	44 - 55	35 - 45	44 - 55	35 - 45	49 - 59	39 - 49	55 - 65	45 - 55

P = rated power of the motor only.

* If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Frequency Range	General		Tools					
			P $\leq$ 700W		700W<P $\leq$ 1000W		P>1000W	
1	2	3	4	5	6	7	8	9
(MHz)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)	Quasi-peak dB(pW)	Average dB(pW)
200-300	Increasing linearly with the frequency from:							
	0 - 10	0	0 - 10	0	0 - 10	0	0 - 10	0

Note: This table only applies if method a) specified in 4.3.4.2 is followed.

Note:


- (1) The limit for radiated test was performed according to as following: CISPR 14.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (μ V/m).

3.1.3 TEST PROCEDURE


- The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.1.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

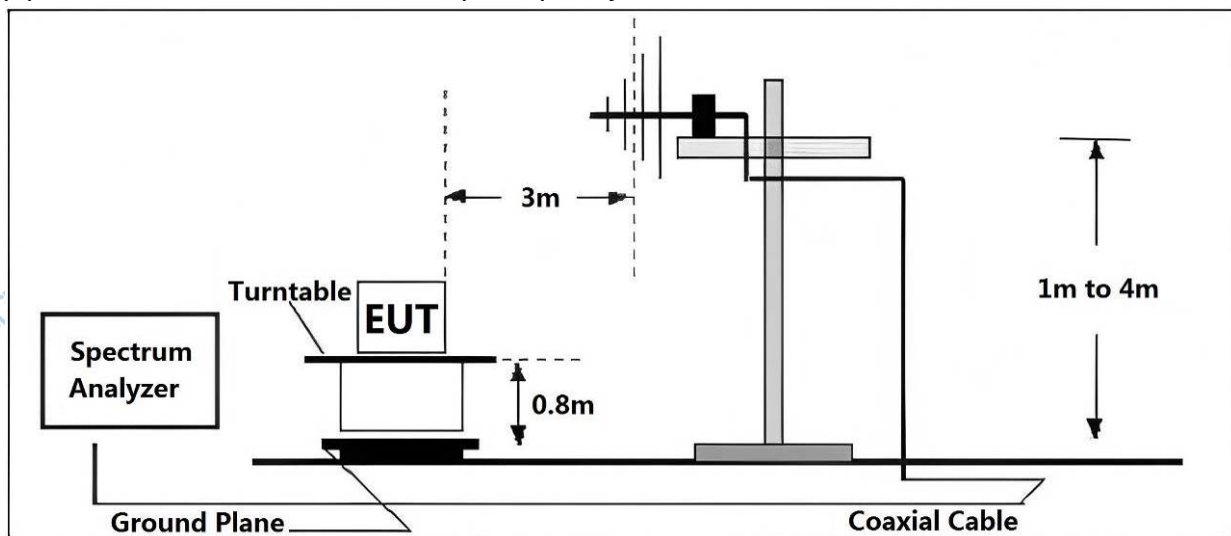

(B) Disturbance power Test Set-Up

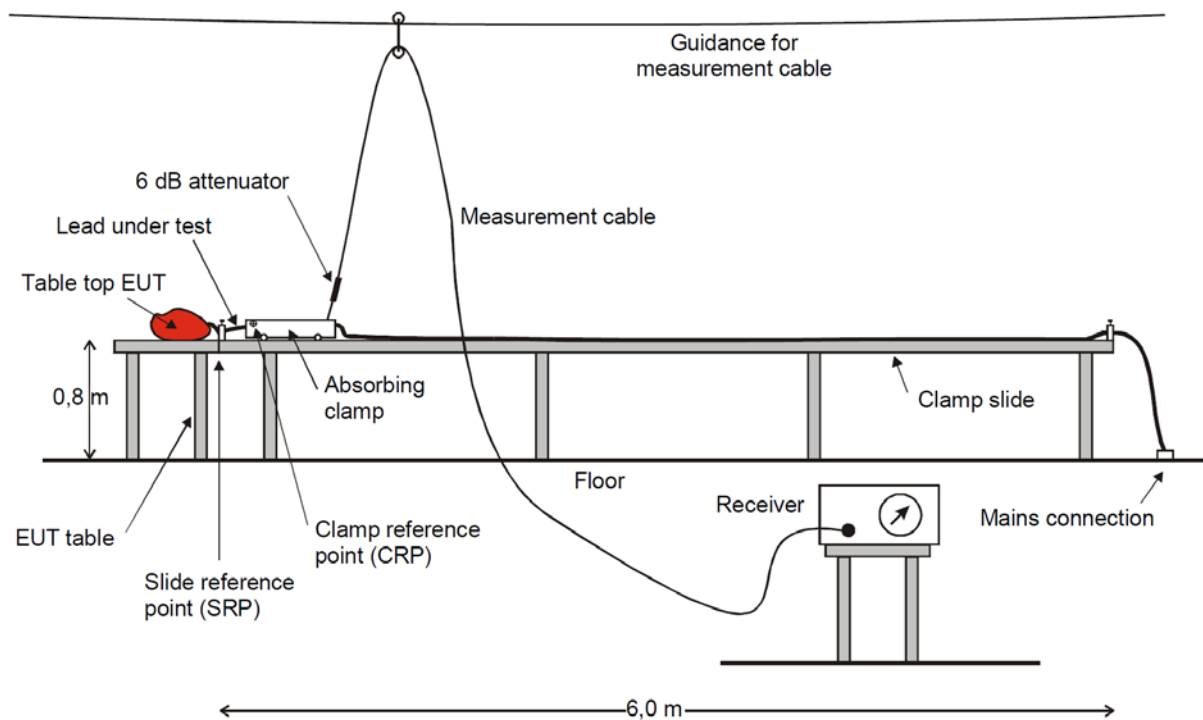


3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.6 TEST RESULTS (30-1000MHz)

EUT:	Massage Comb	Test Model:	SYM-028
Test Mode:	1	Polarization:	Horizontal
Test Power:	DC 5V powered by Adapter AC 230V/50Hz		

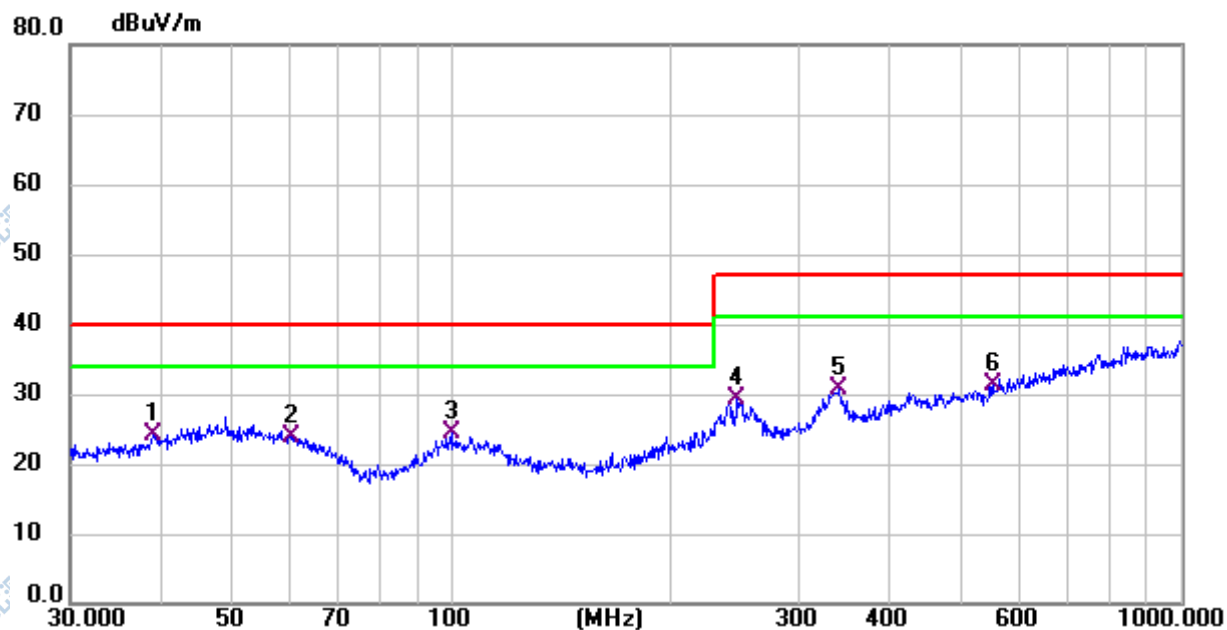


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.024	5.49	18.74	24.23	40.00	-15.77	QP			P	
2	60.280	4.85	19.07	23.92	40.00	-16.08	QP			P	
3 *	99.878	6.76	17.69	24.45	40.00	-15.55	QP			P	
4	246.815	10.19	19.13	29.32	47.00	-17.68	QP			P	
5	340.782	9.04	21.76	30.80	47.00	-16.20	QP			P	
6	552.883	5.91	25.43	31.34	47.00	-15.66	QP			P	

Remark:

Factor = Antenna Factor + Cable Loss.

EUT:	Massage Comb	Test Model:	SYM-028
Test Mode:	1	Polarization:	Vertical
Test Power:	DC 5V powered by Adapter AC 230V/50Hz		

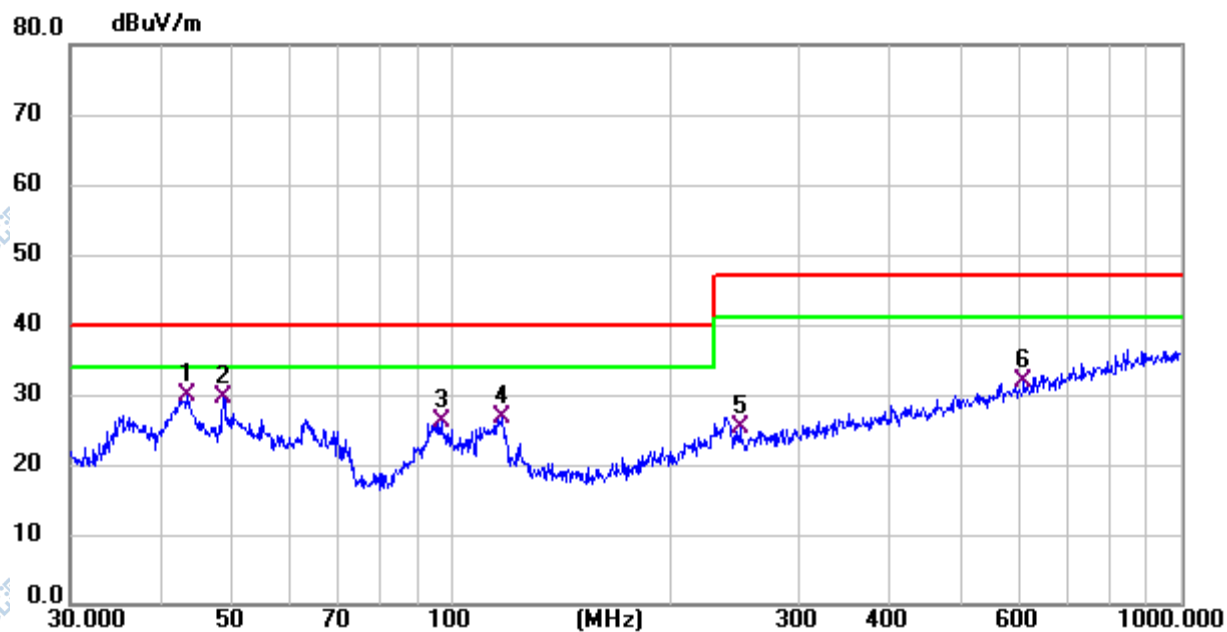

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	43.353	10.25	19.59	29.84	40.00	-10.16	QP			P	
2	48.672	9.50	20.18	29.68	40.00	-10.32	QP			P	
3	96.775	8.73	17.40	26.13	40.00	-13.87	QP			P	
4	117.360	9.96	16.89	26.85	40.00	-13.15	QP			P	
5	248.552	6.26	19.14	25.40	47.00	-21.60	QP			P	
6	609.922	5.42	26.48	31.90	47.00	-15.10	QP			P	

Remark:

Factor = Antenna Factor + Cable Loss.

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	TEST SPECIFICATION	Test Mode Test Ports	Perform Criteria
1. ESD IEC/EN IEC 61000-4-2	8kV air discharge 4kV contact discharge	Direct Mode	B
	4kV HCP discharge 4kV VCP discharge	Indirect Mode	B
2. RS IEC/EN IEC 61000-4-3	80 MHz to 1000 MHz; 1 kHz, 80%, AM modulated	Enclosure	A

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN IEC 55014-2** standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 ESD TESTING

4.4.1 TEST SPECIFICATION

Basic Standard:	IEC/EN IEC 61000-4-2
Discharge Impedance:	330ohm / 150pF
Required Performance:	B
Discharge Voltage:	Air Discharge: 2kV / 4kV / 8kV (Direct) Contact Discharge: 4kV (Direct / Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 20 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.4.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

a. Indirect application of the discharge:

Vertical Coupling Plane (VCP):

At least 10 single discharges (in the most sensitive polarity) shall be applied to the centre of one vertical edge of the coupling plane. The coupling plane, of dimensions 0,5 m × 0,5 m, is placed parallel to, and positioned at a distance of 0,1 m from, the EUT.

Discharges shall be applied to the coupling plane, with sufficient different positions such that the four faces of the EUT are completely illuminated. One VCP position is considered to illuminate 0,5 m × 0,5 m area of the EUT surface.

Horizontal Coupling Plane (HCP):

Discharge to the HCP shall be made horizontally to the edge of the HCP.

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the centre point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.


The discharge electrode shall be in contact with the edge of the HCP before the discharge switch is operated

b. Direct application of discharges to the EUT

The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

4.4.3 TEST SETUP

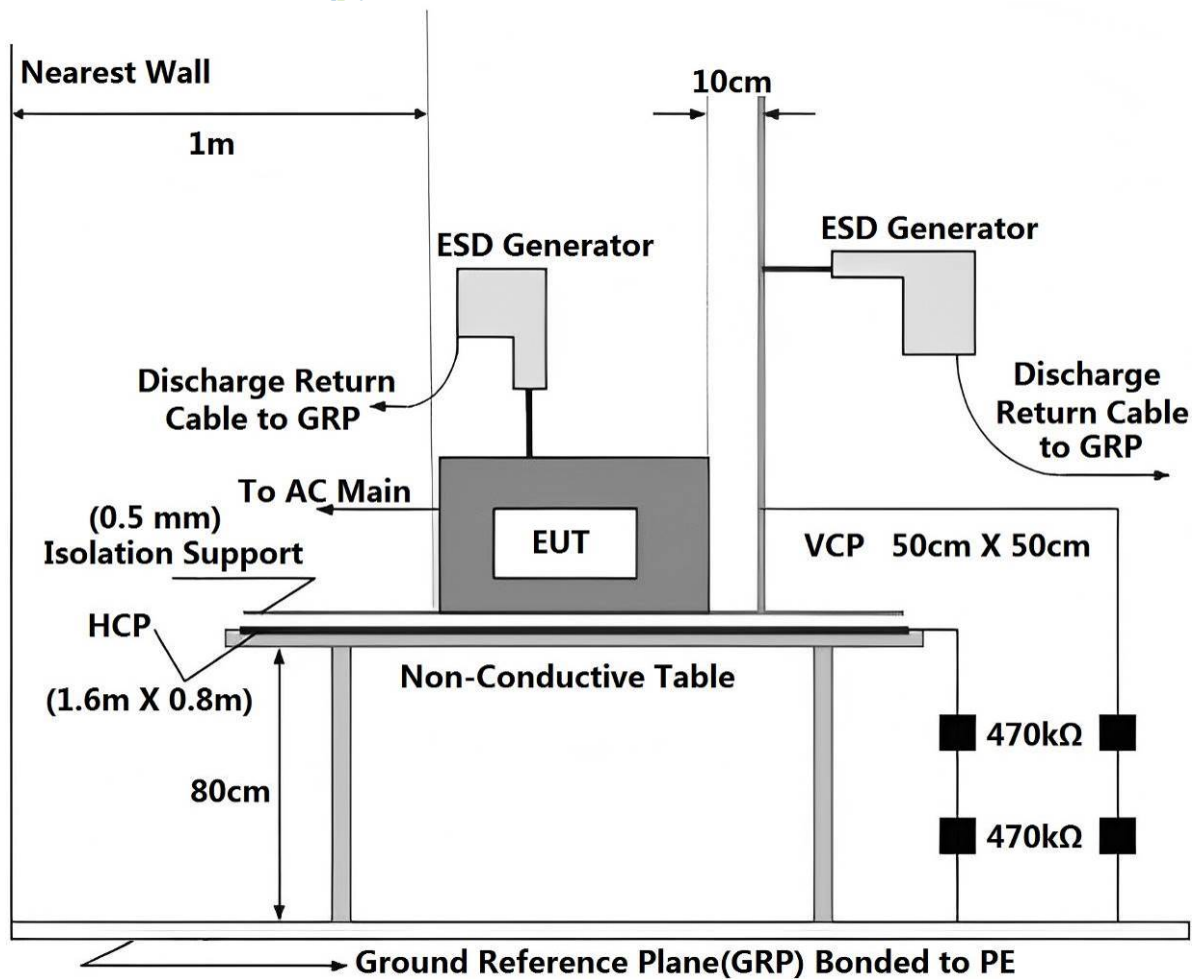

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC/EN IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.4.4 TEST RESULTS

EUT:	Massage Comb	Test Model:	SYM-028
Test Mode:	1		
Test Power:	DC 5V powered by Adapter AC 230V/50Hz / DC 3.7V powered by Battery		

Mode	Contact Discharge (Indirect)									Criterion	Result	Judgment
Test Level(kV)	Test Point	2		4		6		8				
Test Location		+	-	+	-	+	-	+	-			
HCP / VCP	Front	/	/	P	P	/	/	/	/	B	P	Complies
	Rear	/	/	P	P	/	/	/	/			
	Left	/	/	P	P	/	/	/	/			
	Right	/	/	P	P	/	/	/	/			

Mode	Air Discharge								Contact Discharge								Criterion	Result	Judgment
Test Level(kV)	2		4		8		15		2		4		6		8				
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-			
Type-c	P	P	P	P	P	P	/	/	/	/	/	/	/	/	/	/	B	P	Complies
Lamp	P	P	P	P	P	P	/	/	/	/	/	/	/	/	/	/			
Button	P	P	P	P	P	P	/	/	/	/	/	/	/	/	/	/			
GAP	P	P	P	P	P	P	/	/	/	/	/	/	/	/	/	/			

Note:

- (1) +/- denotes the Positive/Negative polarity of the output voltage.
- (2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- (3) Criteria A: Normal performance within limits specified by the manufacturer, requestor or purchaser.
- (4) Criteria B: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the EUT recovers its normal performance, without operator intervention.
- (5) Criteria C: Temporary loss of function or degradation of performance, the correction of which requires operator intervention.
- (6) Criteria D: Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

4.5 RS TESTING

4.5.1 TEST SPECIFICATION

Basic Standard:	IEC/EN IEC 61000-4-3
Required Performance:	A
Frequency Range:	80 MHz to 1000 MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	3 seconds

4.5.2 TEST PROCEDURE


The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:

- The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- Sweep Frequency 900 MHz, with the Duty Cycle: 1/8 and Modulation: Pulse 217 Hz (if applicable)
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.5.3 TEST SETUP

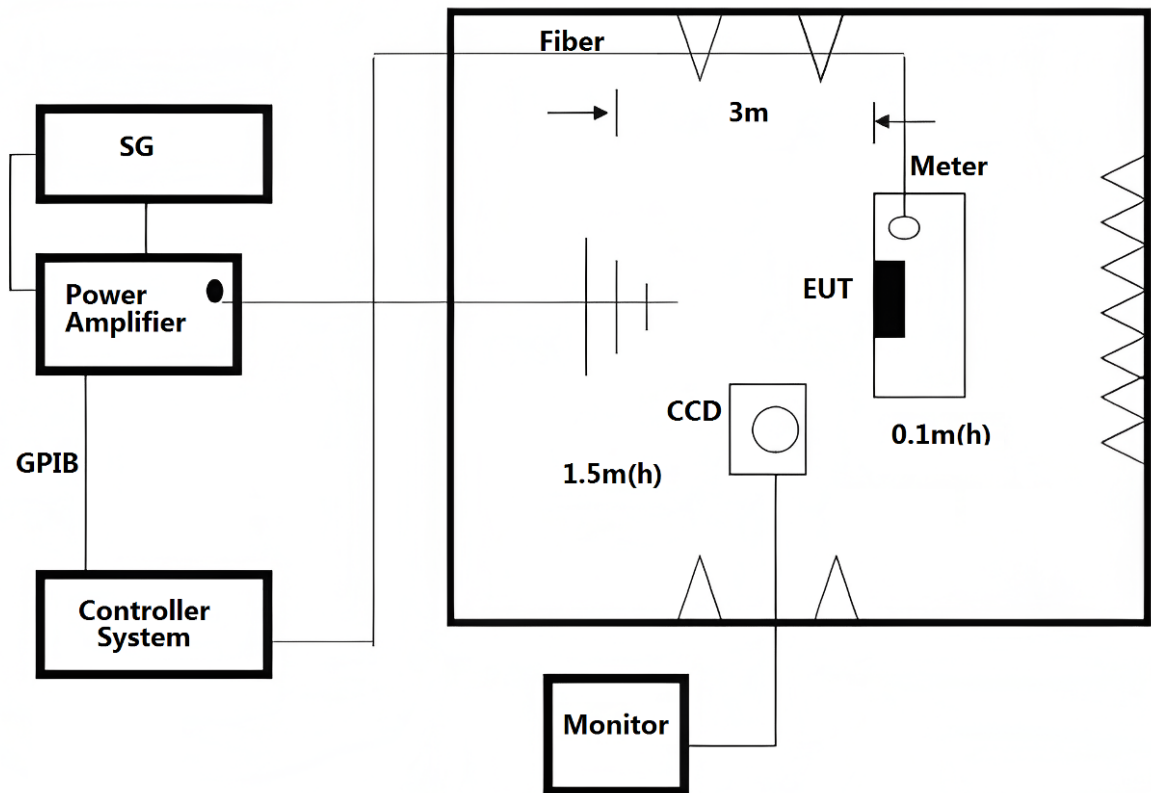

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

4.5.4 TEST RESULTS

EUT:	Massage Comb	Test Model:	SYM-028
Test Mode:	1		
Test Power:	DC 5V powered by Adapter AC 230V/50Hz / DC 3.7V powered by Battery		


Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Criterion	Result	Judgment
80 to 1000	H / V	3 V/m (r.m.s) AM Modulated 1000Hz, 80%	Front	A	P	Complies
			Rear			
			Left			
			Right			

Note:

- (1) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- (2) Criteria A: There was no change operated with initial operating during the test.
- (3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- (4) Criteria C: The system shut down during the test.

5. EUT TEST PHOTO

Radiated Measurement Photo

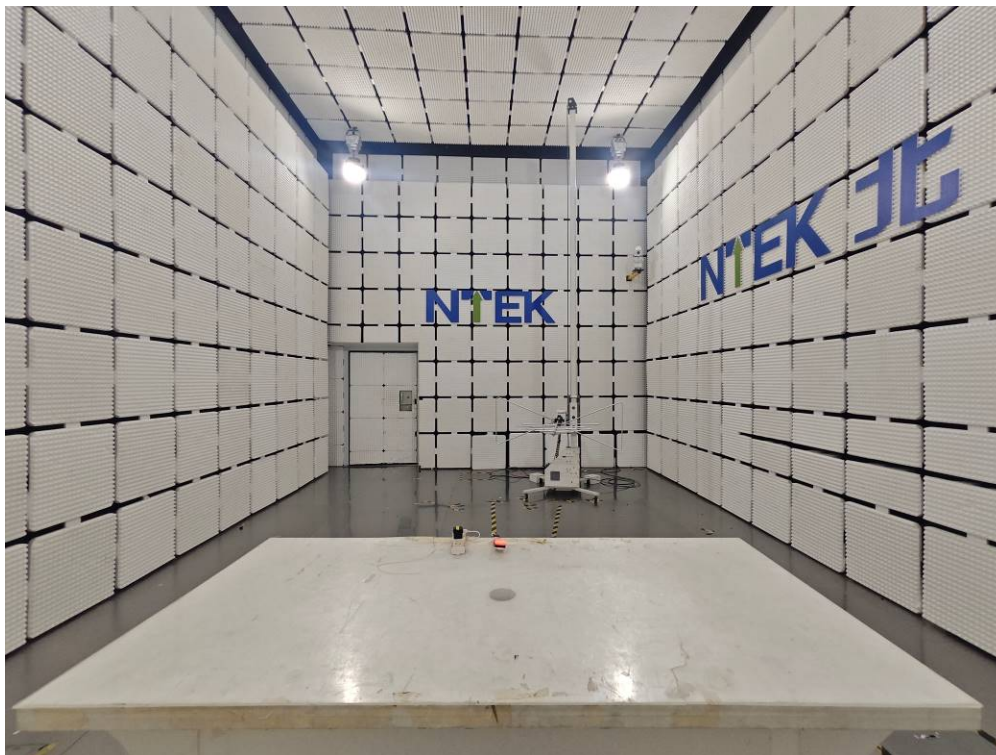

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3



Photo 4

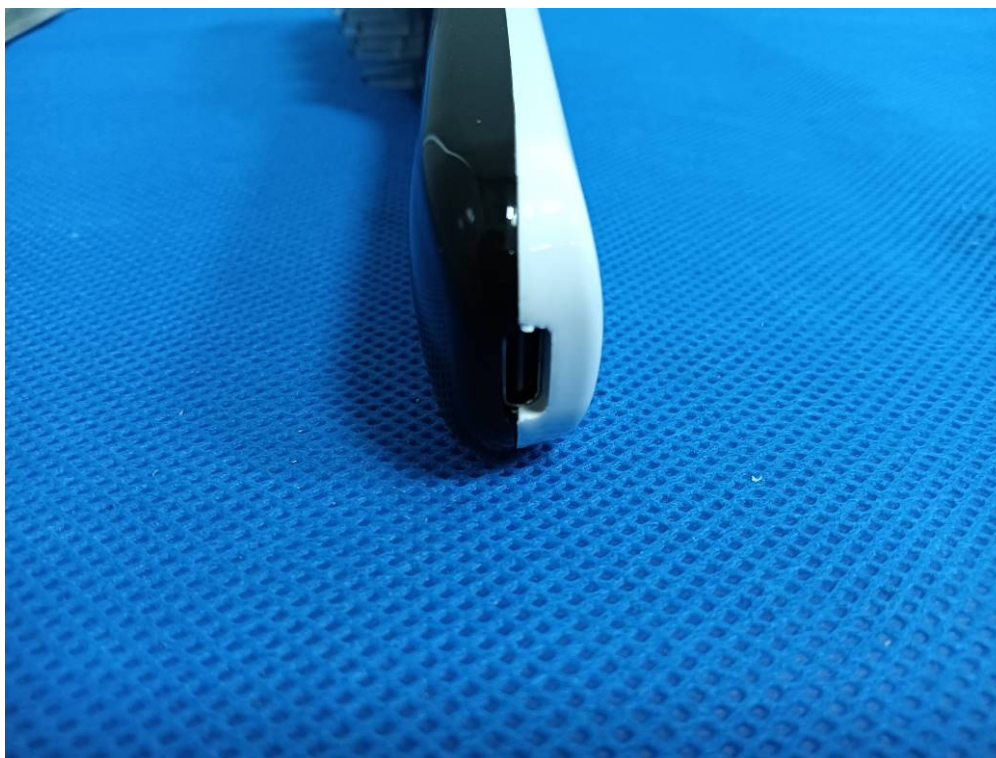


Photo 5



Photo 6



Photo 7



Photo 8

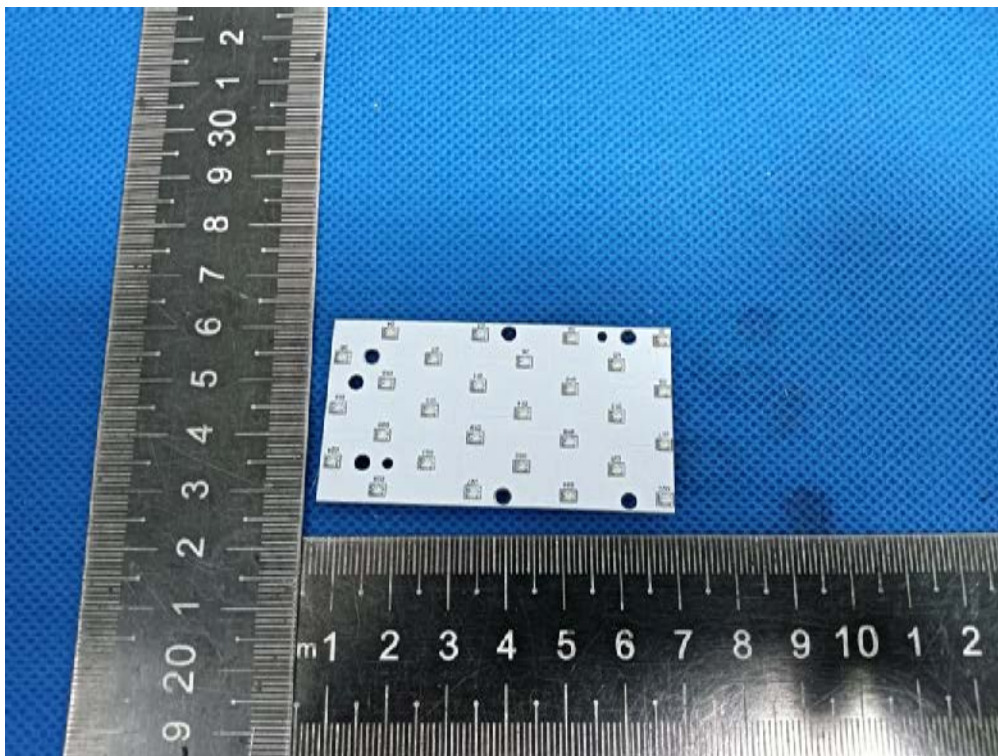


Photo 9

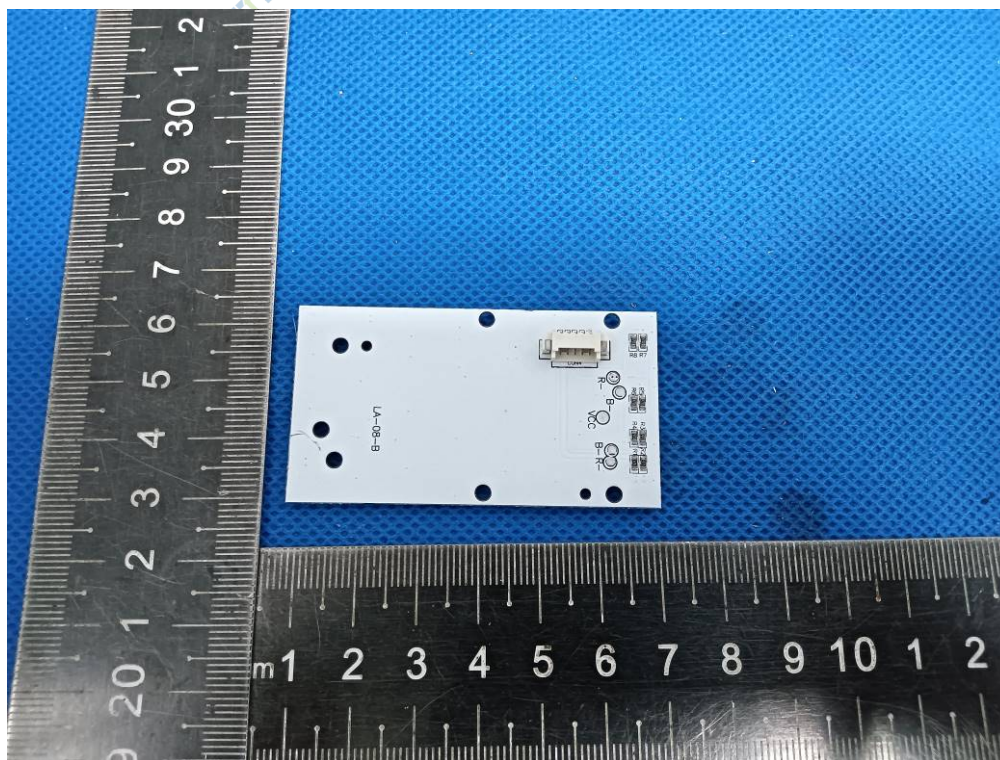


Photo 10

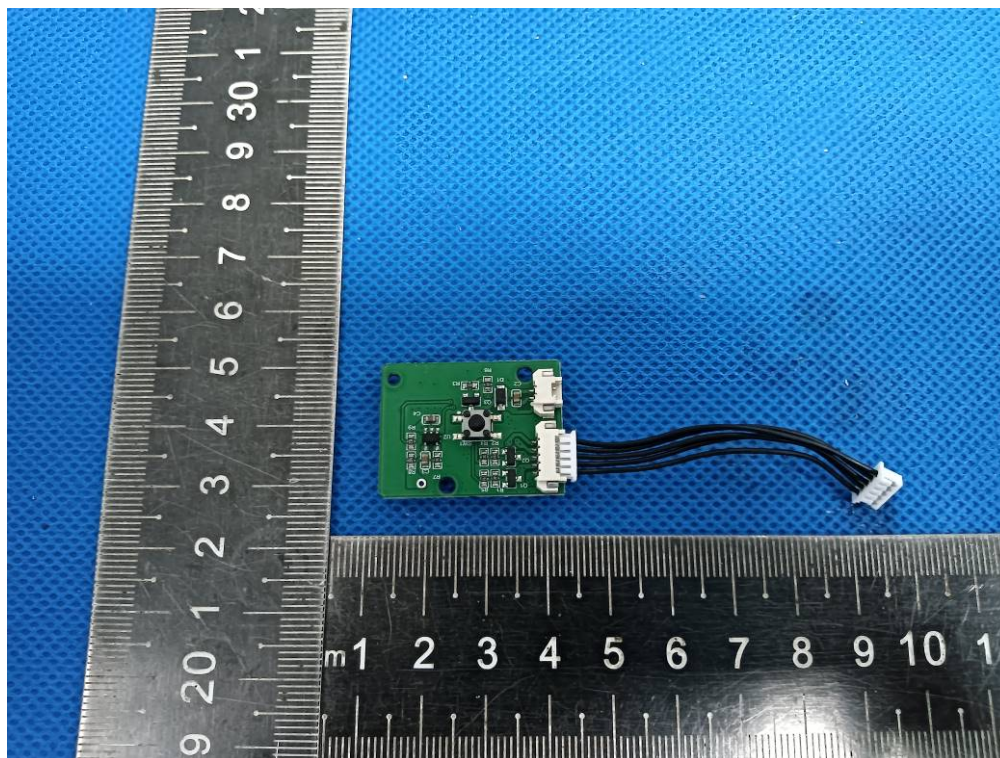


Photo 11

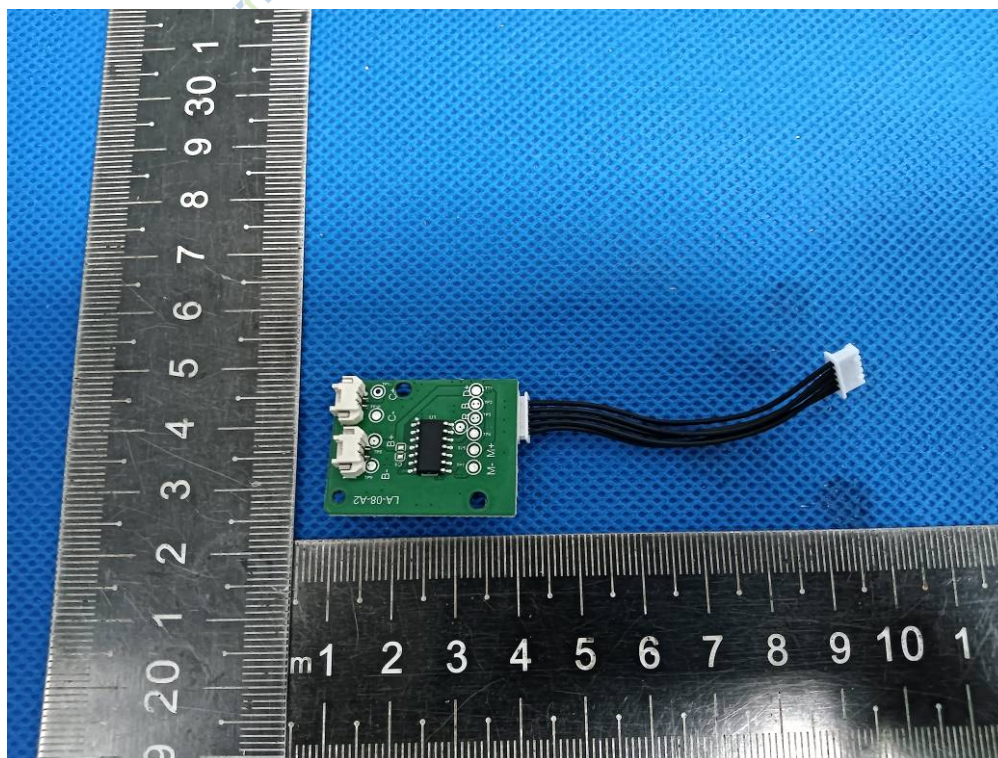


Photo 12


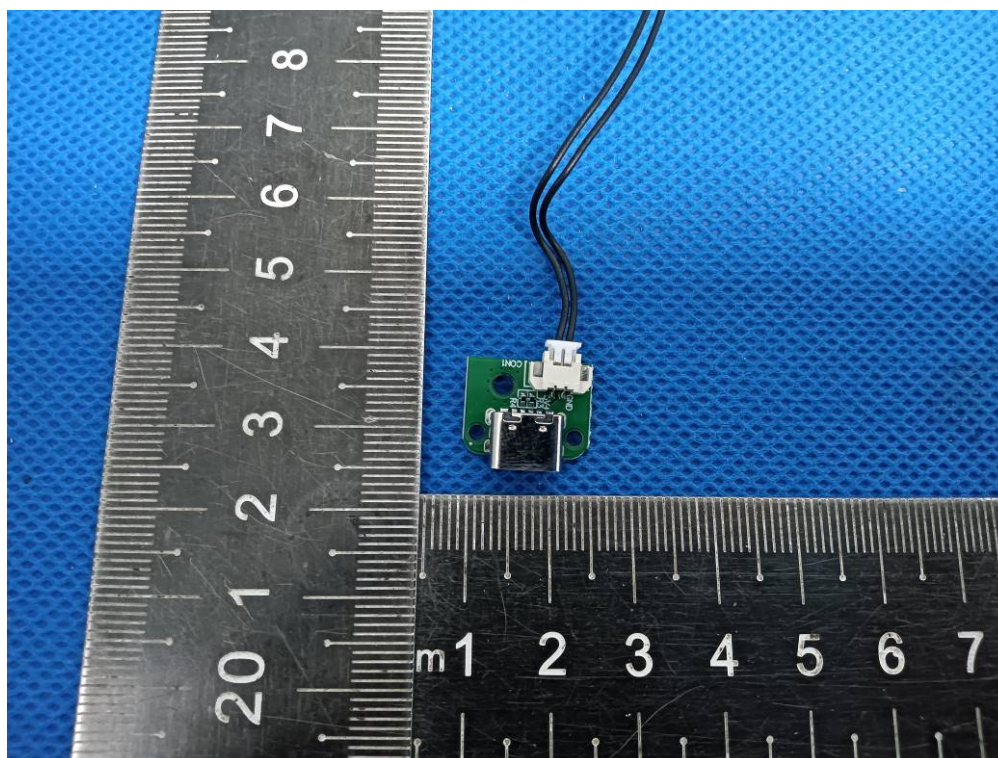


Photo 13

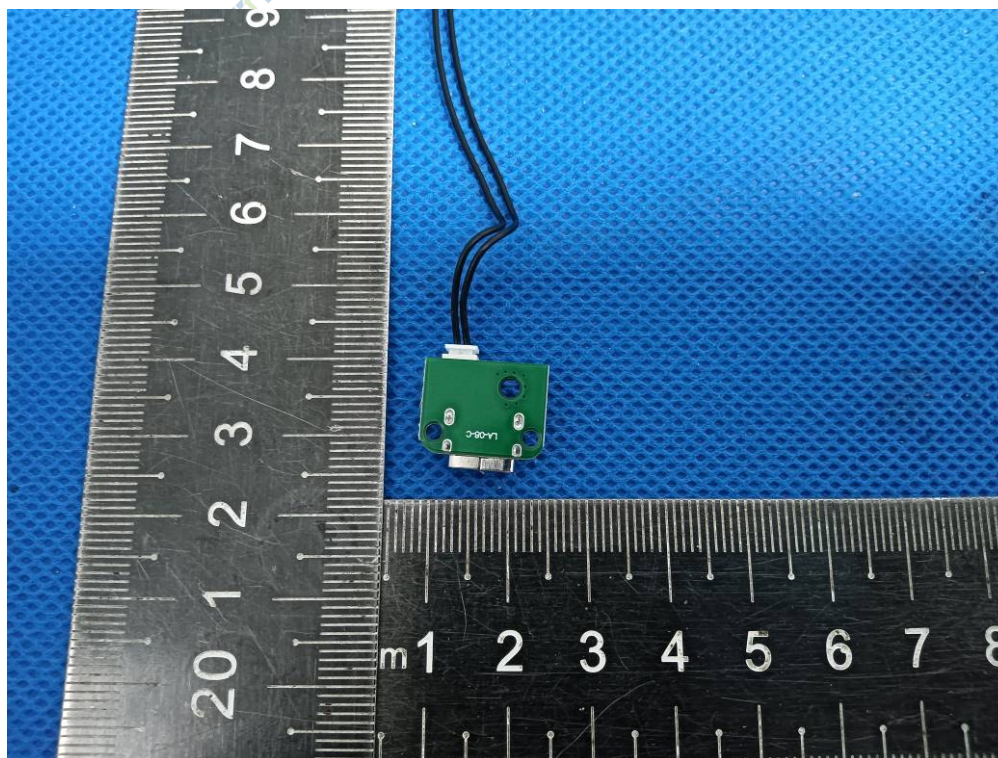

----- End of Report -----